

Miniman 4"

The Clear-Thru performance arm



*Higher maximum
air velocity*

*Lowest possible
pressure drop*

*Lowest possible
noise level*

*Reduced energy
consumption*

*Exterior, easy
adjustable joints*

*Supplied fully
assembled*



© Copyright. All rights reserved.

PLYMOVENT CORP

115 Melrich Road
Cranbury, New Jersey 08512 - USA
Tel. + 1 609 395 3500 Fax. + 1 609 655 0919
www.plymovent.com, info@plymoventusa.com

PLYMOVENT CANADA INC

PlymoVent Canada Inc.
24 - 1200 Aerowood Dr
Mississauga, ON L4W 2S7
Tel. (905) 564-4748, Fax (905) 564-4609
www.plymovent.com, info@plymovent.ca

PLYMOVENT®

Dust extraction with true efficiency

Clear-Thru, totally free from internal mechanisms, the Miniman is the high performance solution for dust applications. Grinding, polishing, slagging and other types of operations generating heavy dust are ideal for this 4" Ø arm. The unobstructed airflow means maximum extraction efficiency and lowest possible pressure drop. Considering the range of design benefits and quality that lasts, the Miniman 4" is a favourite choice for the pros.

Features tuned for Performance

Design allowing high airflow

The 4" Miniman is ideal for applications where a high air velocity is desired such as in grinding, polishing and slagging applications with coarse or heavy dust particles. The Clear-Thru design allows for high maximum air volume at lowest possible noise level.

Efficiency at reduced air volumes

The unobstructed airflow provides effective extraction also with low air volumes. This means reduced costs for the installation, lower demands on filter size and fan capacity, plus energy savings.

Versatility for many tasks

Hanging or standing mounting together with the choice of two lengths make the new arm versatile. It is equally suitable for light fume and smoke applications like soldering, where a larger capture area is desired compared to the Miniman 3". It is also ideal for other light applications as spot welding, TIG welding and in schools and training centers.




Supplied assembled

Miniman 4" is supplied assembled, saving installation time and eliminating assembly mistakes.

Smooth and easy handling

Arm balancing support by an elastic bungee cord (hanging) or gas spring (standing) provides very positive movement characteristics. The external joints are easily adjusted for smooth operation. In hanging application the arm reaches high above its mounting height. The mounting bracket allows for 360° rotation.

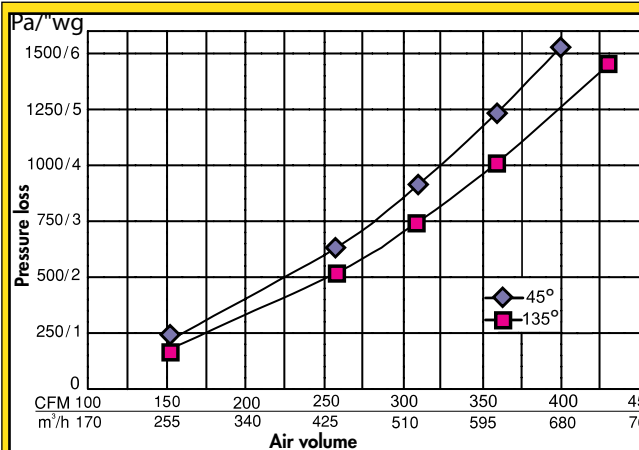

PlymoVent Miniman 4" delivers unsurpassed airflow (flowrates) compared to other arm types.

Close-to-the-source exactness

The hood can easily be angled in all directions. Rubber sealed damper with accurate damper control available as accessory. The rubber sealing minimizes noise when the damper is shut and several damper positions allow fine-tuning of the airflow. A halogen light kit is also available as an accessory.

TECHNICAL DATA

PRODUCT	MMS/MMH-100-15 MMS/MMH-100-15-W	MMS/MMH-100-21 MMS/MMH-100-21-W	MMS – Standing MMH – Hanging
Working radius	5'	7'	
Weight lbs	19,0	20,2	
Tube/hose Ø	4"	4"	
Max air volume	420 CFM	420 CFM	
Rec air volume	180–295 CFM	180–295 CFM	
Accessories			
Halogen light kit	HL-20/24-100	HL-20/24-100	
Damper	D-100	D-100	
Stanchion 3,6'	PA-110	PA-110	
Stanchion 7,2'	PA-220	PA-220	

www.plymovent.com